



Arihant Green Energy Pvt. Ltd. Biratnagar





arihant.greenenergy1@gmail.com





LED LAMPS & TUBE

Arihant go committed to providing the highest quality LED products through our strict quality assurance system. Lights up your nights with high luminescence. Energy saving & long lasting




METAL BOX & DB's

Arihant Go Distribution boards make an essential part of any circuitry in your homes, offices or any other place. This also makes sure that none of the devices suffer from the effects of over currents or short circuits. They fit in perfectly with the interiors of your homes, adding to the aesthetics.



SWITCH & SOCKET

Innovation and designing excellence. The ability to bring a sense of security, quality and affordability drives Arihant Go to bring not just products but simplistic solutions that change for the better, suiting the customer's requirements.



CEILING FAN

Arihant Go FAN is built with the best materials to give optimum results and last long. We bring forward a collection of classic, stylish and efficient fans that you can install in your homes to make them beautiful. With innovative designs and excellent finishes being the key elements

Electrifying your needs...

LED LIGHTING SYSTEM

RANGE

LED Bulb 2 LED Tube Light LED Panel Light LED Surface Light : 6W, 9W, 12W & 18W LED Flood Light LED Saturn down Light : 3W, 6W & 9W LED Spot Light :

- 3W, 5W, 7W, 9W, 12W, 15W, 18W, 30W & 40W : 18W Tube + Fixture : 3W, 6W, 9W, 12W & 18W
- : 30W, 50W, 100W & 150W
 - - 3W, 5W & 7W

DRIVER

High Quality isolation driver for optimal performance of the fixture to ensure less hazarded in operation



LED BULB



LED **TUBE LIGHT**



LED PANEL LIGHT



LED

SATURN DOWN LIGHT

LED SURFACE LIGHT





LED SPOT LIGHT



LED FLOOD LIGHT

100W Arihānī







LED BULB



AVAILABLE WATT

3W, 5W, 7W, 9W, 12W, 15W, 18W & 30W, 40W

PRODUCT FEATURES:

- · High system efficacy: 90 lm/W
- Available with color temperature: 6500 K
- \cdot Color rendering index R a : \geq 80
- Power factor: > 0.9
- · Long life : 40000 hrs (6 hrs/day)
- Wide Voltage input range : 85V 265V
- · Instant 100% light, no warm-up time, no flickering
- · Mercury free
- · Low energy consumption, high colour rendering index

LED SATURN DOWN LIGHT



AVAILABLE WATT
3W, 6W,
&

9W

- High system efficacy: 90 lm/W
- \cdot Available with color temperature: 6500 K
- \cdot Color rendering index R a : \geq 80
- \cdot Power factor: > 0.9
- · Long life : 40000 hrs (6 hrs/day)
- \cdot Wide Voltage input range : 85V 265V
- Instant 100% light, no warm-up time, no flickering
- Mercury free
- · Low energy consumption, high colour rendering index



LED PANEL LIGHT



LED SURFACE LIGHT



AVAILABLE WATT

6W, 9W, 12W

& 18W

PRODUCT FEATURES:

- High system efficacy: 90 lm/W
- Available with color temperature: 6500 K
- · Color rendering index R a : \geq 80
- \cdot Power factor: > 0.9
- · Long life : 40000 hrs (6 hrs/day)
- \cdot Wide Voltage input range : 85V 265V
- \cdot Instant 100% light, no warm-up time, no flickering
- · Mercury free
- Low energy consumption, high colour rendering index

J W, U W,	
9W, 12W	
&	
18W	

AVAILABLE WATT

3W 6W

 High system efficacy: 90 lm/W
 Available with color temperature: 6500 K
• Color rendering index R a : \geq 80
· Power factor: > 0.9
 Long life : 40000 hrs (6 hrs/day)
 Wide Voltage input range : 85V - 265V
· Instant 100% light, no warm up time, no flickering


PRODUCT FEATURES:

• Mercury free

· Low energy consumption, high colour rendering index



LED TUBE LIGHT

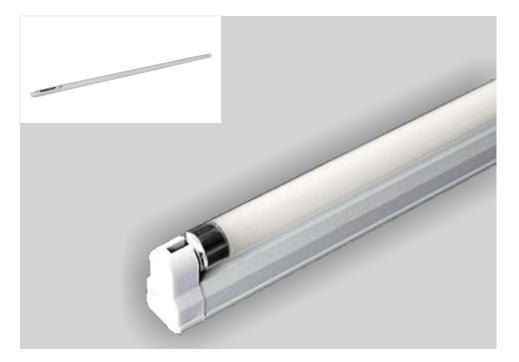

LED SPOT LIGHT



AVAILABLE WATT

3W, 5W

& 7W

· High system efficacy: 90 lm/W

- \cdot Available with color temperature: 6500 K
- \cdot Color rendering index R a : \geq 80
- \cdot Power factor: > 0.9

PRODUCT FEATURES:

- · Long life : 40000 hrs (6 hrs/day)
- \cdot Wide Voltage input range : 85V \cdot 265V
- \cdot Instant 100% light, no warm-up time, no flickering
- Mercury free
- Low energy consumption, high colour rendering index

AVAILABLE WATT

18W Tube

+

Fixture

High system efficacy: 90 lm/W
Available with color temperature: 6500 K
Color rendering index R a : ≥ 80
Power factor: > 0.9
Long life : 40000 hrs (6 hrs/day)
Wide Voltage input range : 85V - 265V
Instant 100% light, no warm-up time, no flickering

- Mercury free
- · Low energy consumption, high colour rendering index



LED FLOOD LIGHT

50 10

85%

85%

arihan



AVAILABLE WATT 30W, 50W, 100 W & 150W

PRODUCT FEATURES:

- · High system efficacy: 90 lm/W
- · Available with color temperature: 6500 K
- \cdot Color rendering index R a : \geq 80
- Power factor: > 0.9
- · Long life : 40000 hrs (6 hrs/day)
- Wide Voltage input range : 85V 265V
- · Instant 100% light, no warm-up time, no flickering
- Mercury free
- · Low energy consumption, high colour rendering index

LED STREET LIGHT



AVAILABLE WATT

50W

&

100W

• High system efficacy: 120 lm/W

- \cdot Available with color temperature: 6000K & 3000K
- · Color rendering index R a : \geq 80
- \cdot Power factor: > 0.9
- Long life : 40000 hrs (6 hrs/day)
- \cdot Wide Voltage input range : 100V 300V
- Instant 100% light, no warm-up time, no flickering
- · Mercury free
- · Low energy consumption, high colour rendering index

DB'S & MODULAR



MCB DISTRIBUTION BOX



AVAILABLE WATT

SPN 4 Way, 6 Way, 8 Way 10 Way, 12 Way & 16 Way

TPN 4 Way, 6 Way & 8 Way

PRODUCT FEATURES:

Material

Thickness

Finish

- Usage/Application - Electric Fittings - Galvanized Iron
 - Paint Coated
 - 18 Gauge
- **Operation Voltage** - 415/240 V AC
- Frequency
- Packing type

- 50 Hz
- Box

MODULAR SWITCH BOX



AVAILABLE WATT

1/2 m, 3 m, 4 m 8 m, 6 m, 12 m & 8 m

PRODUCT FEATURES:

Material

Thickness

Packing type

Finish

- Usage/Application - Junction Boxes
 - Galvanized Iron (GI)
 - Polished
 - - Box
- 5 mm

CEILING FAN



FAN (Economy-48")



AVAILABLE

Color - White/Brown Size - 48"

PRODUCT FEATURES:

- * High Speed
- * Double Ball Bearing
- * 100% Copper Winding
- * Long Lasting Coat
- * Energy Efficient
- * 400 RPM
- * 220-240V, 50Hz, AC
- * An ISO 9001: 2015 Certified Co.

FAN (Decorative-48")



AVAILABLE

Color - Ivory/Golden Size - 48"

- * High Speed
- * Double Ball Bearing
- * 100% Copper Winding
- * Long Lasting Coat
- * Energy Efficient
- * 400 RPM
- * 220-240V, 50Hz, AC
- * An ISO 9001: 2015 Certified Co.

CEILING FAN



FAN (Economy-24")



AVAILABLE

Color - White/Brown Size - 24"

- * High Speed
- * Double Ball Bearing
- * 100% Copper Winding
- * Long Lasting Coat
- * Energy Efficient
- * 400 RPM
- * 220-240V, 50Hz, AC
- * An ISO 9001: 2015 Certified Co.

SWITCH & SOCKET SERIES




SWITCH (Classic- White, Golden & Brown Color)



SWITCH & SOCKET SERIES



SWITCH (Classic- White)

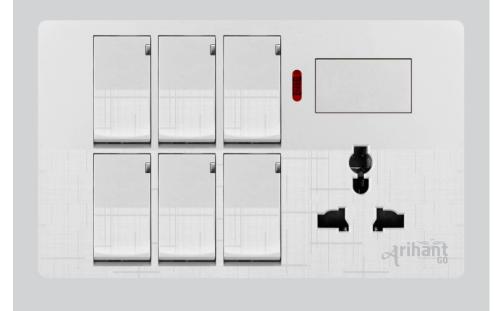

AVAILABLE


<u>White</u>

Complete range of Switches

PRODUCT FEATURES:

- * 100% Pure Brass Paints
- * Anti Shock
- * Long Life
- * Compatible with Multi-sountry Plug
- * Sock Proof Body
- * Overload & Short Circuit Protection
- * Electricity consumption -10 Ah 250 V

SWITCH (Classic- Golden)

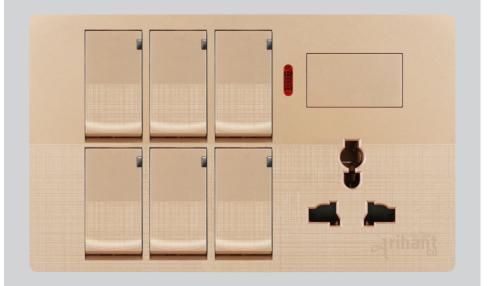

AVAILABLE

<u>Golden</u> Complete range of Switches

- * 100% Pure Brass Paints
- * Anti Shock
- * Long Life
- * Compatible with Multi-sountry Plug
- * Sock Proof Body
- * Overload & Short Circuit Protection
- * Electricity consumption -10 Ah 250 V

SWITCH & SOCKET SERIES



SWITCH (Classic- Brown)



AVAILABLE

<u>Brown</u> Complete range of Switches

PRODUCT FEATURES:

- * 100% Pure Brass Paints
- * Anti Shock
- * Long Life
- * Compatible with Multi-sountry Plug
- * Sock Proof Body
- * Overload & Short Circuit Protection
- * Electricity consumption -10 Ah 250 V

SOCKET (Classic- Golden)



AVAILABLE

<u>Golden</u> Complete range of Sockets

- * 100% Pure Brass Paints
- * Anti Shock
- * Long Life
- * Compatible with Multi-sountry Plug
- * Sock Proof Body
- * Overload & Short Circuit Protection
- * Electricity consumption -10 Ah 250 V